LunchVoice

Brand guidelines

How LunchVoice looks, in one place: the logo, the colours, the type, and how to use them on the site, in the app, on social media and in video.

Version 1.0 · November 2026

Who we are

LunchVoice is a surveys and feedback platform for any community: clubs, teams, events, classrooms, workplaces and online communities. People answer anonymously or by name, and the community sees what was decided.

The name is one word with a capital L and a capital V: **LunchVoice**. Never "Lunch Voice", "Lunchvoice" or "LUNCHVOICE" in running text.

Tagline

Make every voice count.

This is the one tagline. It appears beside or below the logo in marketing, never inside the logo file. The logo always works without it.

Retired lines, not to be used on anything new: "Smart feedback. Better cafeterias." and "Every voice has a story. Hear it." LunchVoice is not a cafeteria product; dining is one of many uses.

Character

- **Ink anchors.** Most of what you see is ink on a calm neutral, or bone on ink.
- **Amber is the accent.** One amber thing per screen or graphic: the thing that matters most.
- **Confident, not loud.** Big, tight display type; plain words; no stock photos, no invented numbers, no emoji standing in for icons.

The logo

The logo is the LV symbol and the LunchVoice wordmark. The symbol is an L and a V, an amber speech bubble with three dots, and an amber smile beneath. It was not redrawn for this kit: the shapes are the approved ones, now kept in one file from which every version is generated.



Primary horizontal logo. Use this first.



Stacked logo, for centred and square layouts.



Symbol, when the name is already nearby.



Wordmark alone, rarely.



Icon: the symbol in white on an amber tile.

The wordmark

Bricolage Grotesque, weight 800, optical size 96, tracking -0.03em, converted to outlines so it looks the same everywhere. Do not retype it in another font.

Construction and clear space



x is the height of the speech bubble's body (shaded). Keep at least **x** of empty space on every side of the logo, measured from its outermost edges.

In the horizontal logo the wordmark's capital height is half the height of the L, and the wordmark is centred on the L and V, not on the whole symbol. In the stacked logo the L and V, not the bubble, sit on the centre line.

Smallest sizes

Version	Screen	Print
Horizontal logo	96px wide	25mm
Stacked logo	72px wide	20mm
Symbol	24px tall	7mm
Small-size symbol and icon	16px	4mm

Small sizes

Below 48px the smile and the three dots blur into noise, so the small-size symbol leaves them out. The L, the V and the bubble are the same shapes. Icon files under 48px already use it; do not shrink the full symbol instead.



Colour versions

Four treatments of the same drawing. Pick by background, not by taste.



For light backgrounds. Ink letters, amber bubble and smile. Page, white or bone.



For dark backgrounds. Bone letters, amber bubble and smile. Ink or any dark photo or video.



One colour, ink. When colour cannot be printed, and on amber.



One colour, white. Over video and photos, and on amber.

On amber



Ink on amber: preferred.



White on amber: large sizes only.


Every file has a transparent background. In the one-colour versions the dots are cut out of the bubble and a thin gap separates the bubble from the V, so the logo stays a single flat colour.

Using the logo well

Do

- Use the files in this kit as they are. Scale them in proportion.
- Keep the clear space, and put the logo on a plain area of a photo or video.
- Use the dark-background version on anything darker than a mid grey.

Do not



Ink letters on a dark background: they disappear.



Stretch or squash it.



Change the colours.



Add shadows, glows, outlines or gradients.



Rotate or tilt it.



Retype the name in another font, or redraw the symbol.

Also never: put a tagline inside the logo, use the old rounded LV with soft corners, or use any file that says "Better cafeterias".

Colour

Five brand colours. The product's full token list, in light, dark and high contrast, with every measured contrast ratio, is in `COLOR_SPEC.md` beside this document; the live source is `src/ui/tokens.css`.

	Name	HEX	RGB	HSL	Put on it	Use
	Amber	`#FF9A18`	`255, 154, 24`	`34, 100%, 55%`	Ink	The accent
	Ink	`#14110F`	`20, 17, 15`	`24, 14%, 7%`	Bone, white	The anchor
	Bone	`#F7F3EA`	`247, 243, 234`	`42, 45%, 94%`	Ink	Text on ink
	Page	`#EEEDEA`	`238, 237, 234`	`45, 11%, 93%`	Ink	Page background
	White	`#FFFFFF`	`255, 255, 255`	`0, 0%, 100%`	Ink	Cards, surfaces

Supporting colours

	Name	HEX	RGB	HSL	Put on it	Use
	Deep amber	`#E98207`	`233, 130, 7`	`33, 94%, 47%`	Ink	Hover, outlines
	Light amber	`#FFB347`	`255, 179, 71`	`35, 100%, 64%`	Ink	Amber on dark
	Amber text	`#8F4A00`	`143, 74, 0`	`31, 100%, 28%`	—	Amber that must be read
	Muted	`#4A4540`	`74, 69, 64`	`30, 7%, 27%`	—	Supporting text
	Subtle	`#6A645E`	`106, 100, 94`	`30, 6%, 39%`	—	Captions
	Line	`#DAD8D4`	`218, 216, 212`	`40, 7%, 84%`	—	Hairlines
	Success	`#2E8A4E`	`46, 138, 78`	`141, 50%, 36%`	White	Success
	Danger	`#C2382B`	`194, 56, 43`	`5, 64%, 46%`	White	Errors, destructive

How much of each



Roughly: neutrals lead, ink anchors, amber is about a tenth. A graphic may flip to mostly ink; it never becomes mostly amber except a deliberate full-amber background.

Colour you can read

Measured WCAG contrast ratios, rounded down. Text needs 4.5:1; text of 24px and up (or 19px bold and up) and icons need 3:1.

	Combination	Ratio	Good for
Aa	Ink on Page	16:1	Text and icons
Aa	Ink on White	18.8:1	Text and icons
Aa	Ink on Amber	8.8:1	Text and icons
Aa	Bone on Ink	16.9:1	Text and icons
Aa	Amber on Ink	8.8:1	Text and icons
Aa	Amber text on White	6.6:1	Text and icons
Aa	Amber text on Page	5.6:1	Text and icons
Aa	Muted on Page	8:1	Text and icons
Aa	Subtle on Page	4.9:1	Text and icons
Aa	Amber on White	2.1:1	Not for text
Aa	Amber on Page	1.8:1	Not for text
Aa	White on Amber	2.1:1	Not for text

Three rules that follow

- **Amber is not a text colour on light backgrounds.** It fails. Use Amber text (`#8F4A00`) or put the amber on ink.
- **Text on amber is ink**, never white. The one exception is the icon, where the white symbol on amber is a mark, not text, and is never smaller than 16px.
- **The tagline's amber word appears only on ink.** On a light background the whole line is ink.

Light, dark and high contrast

The product has three themes that redefine the same colour names. On dark, text becomes bone, surfaces become warm near-blacks and amber stays amber. In high contrast everything is black on white with a lighter amber. Marketing follows the same logic: a design is either light (ink on neutral) or dark (bone on ink).

Typography

Three typefaces, all open source (SIL Open Font License) and free to use anywhere, including Canva and Google Fonts.

Bricolage Grotesque	**Display.** Headlines, the tagline, big numbers. Weight 800, tight tracking (-0.03 to -0.05em), tight leading (0.88 to 1.0). If unavailable: Archivo ExtraBold, then Arial Black.
Geist	**Interface and body.** Everything you read or press. Weights 400, 500, 600; normal tracking; leading 1.4 to 1.55. If unavailable: Inter, then Arial or Helvetica.
Space Mono	**Data.** Codes, web addresses, numbers and small labels on public pages only. Weights 400 and 700. If unavailable: IBM Plex Mono, then Courier New.

Sizes

Use	Face and weight	Size	Leading	Tracking
Marketing hero heading	Bricolage 800	52 to 112px, scales with the screen	0.88	-0.05em
Page heading (public)	Bricolage 800	40 to 68px	0.95	-0.045em
Section heading (public)	Bricolage 800	36 to 60px	0.95	-0.04em
Page heading (app)	Bricolage 800	34 to 56px	0.98	-0.045em
Card and panel heading	Geist 600	18px	1.3	-0.01em
Body	Geist 400	16px (15px in dense lists)	1.5	0
Lead paragraph	Geist 400	16 to 19px	1.55	0
Button	Geist 500 to 600	14.5 to 17px	1	0
Field label	Geist 600, sentence case	13px	1.25	0.005em
Caption, help text	Geist 400	13px (never under 12px)	1.45	0
Data value	Bricolage 800 for big figures; Space Mono 700 for codes	34 to 46px; 12 to 15px	0.95; 1	-0.04em; 0
Eyebrow (public pages only)	Space Mono 700, capitals	12px	1.2	0.14em

These are the values the site uses today (`src/styles/landing.css`, `src/ui/ui.css`). Nothing on screen is set below 12px.


Type in video and social

Use	Face and weight	Size on a 1080-wide frame	Notes
Headline or hook	Bricolage 800	96 to 140px	Leading 0.95, tracking -0.045em. Five words or fewer per line.
Supporting line	Geist 500	40 to 52px	One sentence.
Captions and subtitles	Geist 600	44 to 56px	Bone on an ink panel, or ink on bone. Never amber.
Web address, codes	Space Mono 400 or 700	28 to 36px	Lower case: lunchvoice.com
Lower-third name	Geist 600	40px on a 1920-wide frame	Role beneath in Space Mono 22px.

The tagline as a graphic



On ink: bone, with the last word in amber.

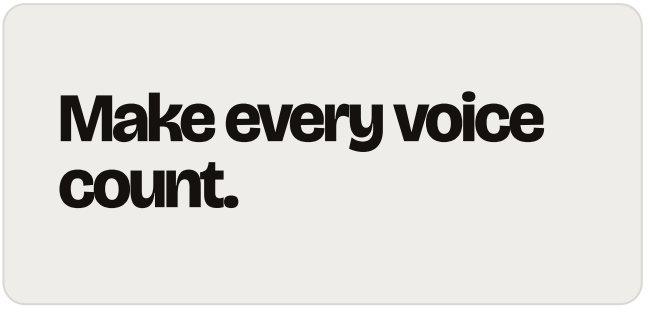

On light: all ink. Amber would not be readable.

In Canva

All three fonts are in Canva's library under the same names. Add them to the Brand Kit as Heading (Bricolage Grotesque, ExtraBold), Body (Geist, Regular) and Caption (Space Mono). `canva/CANVA_SETUP.md` has the steps.

Icons and motion

Icons

One line-icon set, drawn on a 24px grid with a 1.75px stroke and round ends (`src/components/Icon.tsx`). Icons take the colour of the text beside them. No emoji in place of icons, no filled icon packs, no mixing of sets. Outside the product (slides, video) use a matching rounded line style at the same stroke weight.

Motion

- **Motion answers an action.** Pressing, opening, confirming, moving to the next question. Nothing moves just to decorate.
- **The press is springy.** Controls squash slightly and spring back (260ms, `cubic-bezier(0.34, 1.56, 0.64, 1)`).
- **Entrances ease out** (420ms, `cubic-bezier(0.22, 1, 0.36, 1)`). One orchestrated moment per page at most.
- **Reduced motion is respected.** Every duration drops to zero for people who ask for it.

The logo in motion

- Allowed: fade in; the bubble popping in last with the springy ease; the three dots appearing one after another; the smile drawing on from left to right.
- Not allowed: spinning, bouncing the whole logo, 3D, glows, colour cycling, morphing the letters.
- End on the still logo, held for at least one second, with its clear space.

Shadows, gradients, effects

The logo files have none, and should gain none. Surfaces in the product are flat with hairlines; only things that float (menus, dialogs) cast a shadow. A marketing composition may add depth around the logo, never to it.

Social media


Ready-made frames in `social/`, each at the platform's size with the logo and tagline already inside the area every device shows. `social/guides/` has the same frames with that area marked.



Instagram portrait



Reel and Short

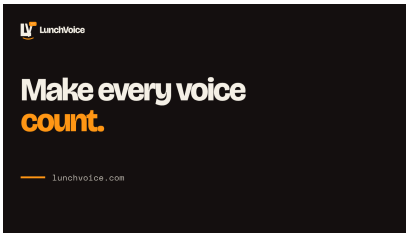

YouTube thumbnail



Facebook cover



LinkedIn banner

Sizes and what gets cropped

Asset	Size	Keep important things inside
instagram profile	1080 x 1080	Shown as a circle; the symbol sits well inside it.
instagram square	1080 x 1080	Profile grid crop (3:4): 810 x 1080
instagram portrait	1080 x 1350	Profile grid crop (3:4): 1012 x 1350
instagram reel	1080 x 1920	Clear of the app's buttons and captions: 900 x 1420
youtube shorts	1080 x 1920	Clear of the app's buttons and captions: 900 x 1420
youtube thumbnail	1280 x 720	Above the duration badge: 1280 x 620
youtube banner	2560 x 1440	Visible on every device (1546 x 423): 1546 x 423
linkedin banner	1128 x 191	Clear of the page logo: 858 x 191
facebook cover	851 x 315	Visible on phones (640 wide): 640 x 315
presentation	1920 x 1080	The whole frame

Checked in November 2026. Platforms change these; recheck before a campaign (`documentation/SOCIAL_SPECS.md`).

Profile pictures

Use the amber icon (`social/instagram-profile_1080x1080.png`) on every platform. The symbol sits well inside a circular crop. Never the horizontal logo: it is unreadable at avatar size.

Video



Outro, wide (1920 x 1080)



Outro, vertical



Title card, with an example title



Right: the lower third over footage, with example text. The file itself is transparent and has no text.

Rules

- **Watermark or corner logo:** the one-colour white logo, top left or top right, at about 12% of the frame's width, inside the title-safe area (5% in from each edge).
- **Over footage,** use the dark-background or white logo and make sure the area behind it is dark and calm. If it is not, put the logo on an ink panel.
- **End every video on the outro** for at least 1.5 seconds: stacked logo, tagline, lunchvoice.com.
- **Lower thirds** sit bottom left. Name in Geist 600, role in Space Mono.
- **Backgrounds:** ink, amber, bone and page are in `video/backgrounds/` at both shapes.

All files are PNG, which Canva, CapCut, Premiere, DaVinci Resolve and Final Cut read directly. The overlays in `video/overlays/` are transparent.

Website and app

The site and the app are built from one design system (`DESIGN.md`, `src/ui/tokens.css`). The brand shows up in it like this:

- **The logo in the header** is drawn by the `LvMark` component, which uses these exact shapes and takes the text colour of whatever it sits on, so it is ink on light, bone on dark, and bone on the home page's ink header. Never place a logo image file in the interface.
- **Public pages are expressive:** big Bricolage headings, ink and amber bands. **App pages are calm:** flat surfaces, hairlines, sentence-case labels.
- **One amber primary button per screen.** Everything else is secondary, ink or quiet.
- **Inside a customer's Hub,** the Hub's own colour replaces amber for that Hub's controls. LunchVoice amber stays for LunchVoice's own actions, and "Powered by LunchVoice" keeps the real logo.
- **Three themes:** light, dark and high contrast. Anything new has to work in all three.

Icons the site ships

File in public/	Used for	From
`favicon.ico`	Browser tab (16, 32, 48)	Small-size icon
`favicon-32.png`	Browser tab	Small-size icon
`apple-touch-icon-180.png`	iPhone and iPad home screen	Square icon
`android-icon-192.png, app-icon-512.png`	Android and installed app	Rounded icon
`icon-maskable-192.png, -512.png`	Android adaptive icon	Maskable icon
`og-image.png`	Link previews (1200 x 630)	Horizontal logo and tagline
`brand/*.svg`	Public downloads of the logo	source-svg

Files and names

Everything is in `brand/lv-package/` and is generated: `npm run brand:build` rebuilds it from `scripts/brand/logo.mjs`, and `npm run check:brand` verifies it. Do not edit an export by hand; change the source and rebuild.

Folder	What is in it
`source-svg/`	Vector masters of every version. Open in Figma, Illustrator or Inkscape.
`logo/`	Transparent PNGs of every version at several widths.
`favicons/`	favicon.ico and PNGs for browsers and iOS.
`app-icons/`	The icon at 16 to 1024px, plus square and maskable shapes.
`social/`	Platform-sized frames, with safe-area guides.
`video/`	Outros, title card, lower third, backgrounds, transparent overlays.
`canva/`	The short list to upload to a Canva Brand Kit, and how.
`documentation/`	This PDF, the colour and type specifications, the audit and the comparison sheet.

How files are named

`lunchvoice-<what>-<treatment>_<width>.png`

- **what:** `logo-horizontal`, `logo-stacked`, `mark`, `mark-small`, `wordmark`, `icon`
- **treatment:** `on-light`, `on-dark`, `mono-dark`, `mono-light`
- **size:** the width in pixels, or width x height when the canvas is a fixed shape.

Which format

- **SVG** for the web, print and anything that will be scaled.
- **PNG** (transparent) for slides, documents, Canva and video.
- **ICO** only for the browser tab icon. **WebP** copies are provided for the largest web images.

Questions and changes

A new colour, font, logo version or tagline needs the founder's approval before it is used. Write to admin@lunchvoice.com.